


Follow these general instructions to install an MS-DOS application driver:

1. With the MS-DOS SVGA Accelerator drivers diskette in Drive A, type a: at the operating system prompt and press <ENTER>.
2. Type install and press <ENTER>
The INSTALL command displays the main menu, listing the software drivers available on the diskette.

The INSTALL Screen:

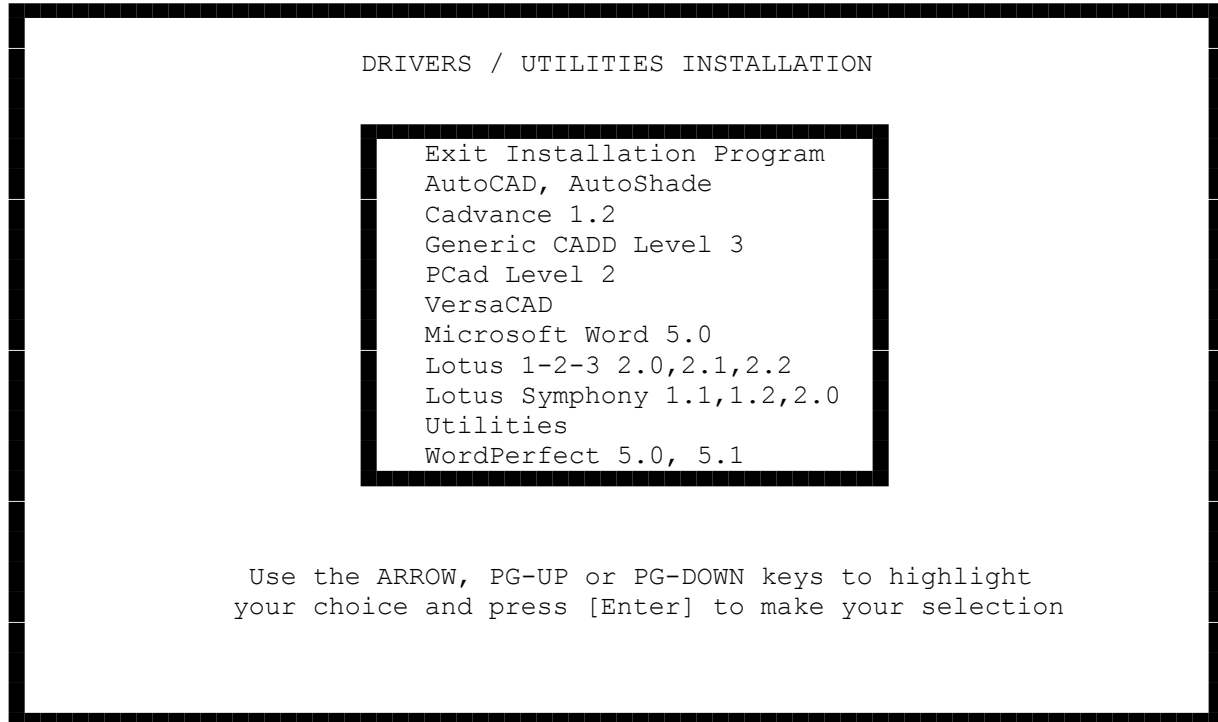

3. Use the arrow keys to scroll down and highlight the application driver you wish to install. Press <ENTER>.
4. Select the driver you wish to install, and follow the instructions on the screen. When finished, INSTALL returns you to the main menu.
5. Install other drivers from the menu, if necessary, or select Exit Installation Program to return to the operating system prompt.

Note: VGAMODE.EXE and VESA.EXE are installed from the Utilities menu.

Faxback Document # 2209 will provide specific details on using VGAMODE.EXE

Faxback Document # 2219 will provide specific details on using VESA.EXE

Note: We recommend making a backup copy of the drivers diskettes, using the MS-DOS diskcopy command.

(smm 08/25/93)